




SE3-02 Servo Valves

SE3-02-220-002-10
SE3-02-405-002-10

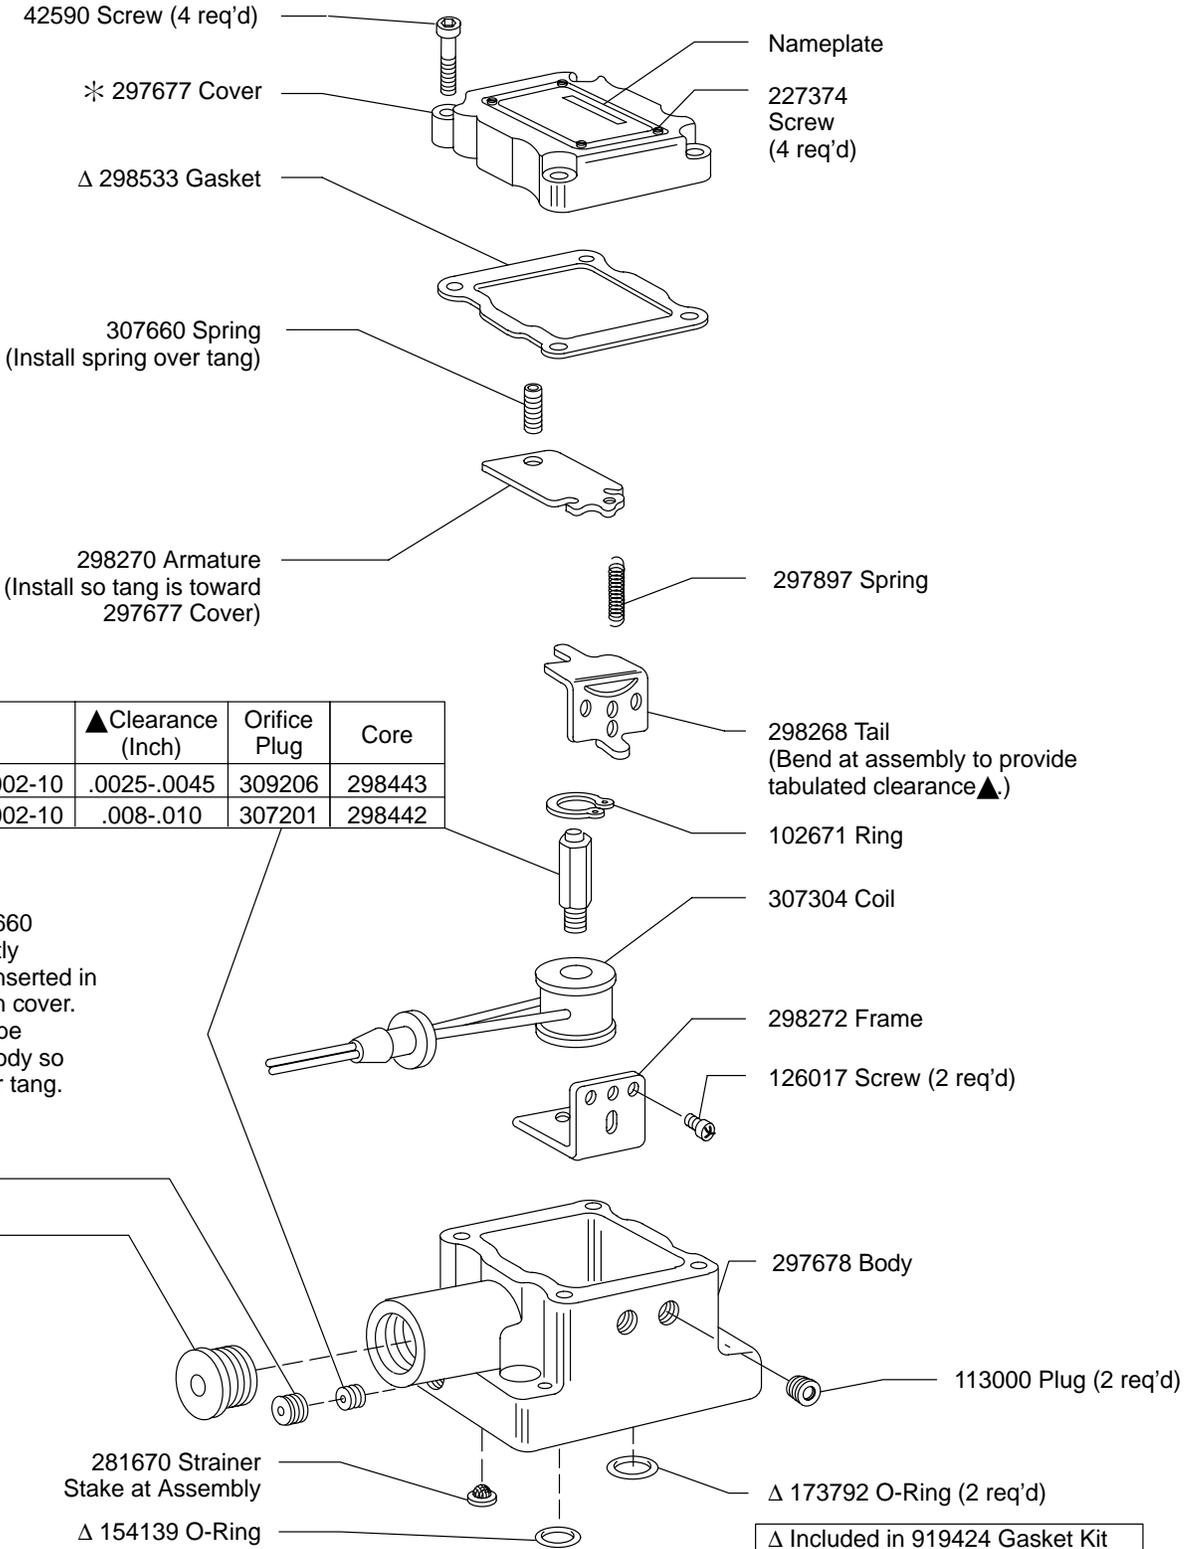

Model	▲ Clearance (Inch)	Orifice Plug	Core
SE3-02-220-002-10	.0025-.0045	309206	298443
SE3-02-405-002-10	.008-.010	307201	298442

※ Spring 307660 should be lightly greased and inserted in retainer hole in cover. Cover should be mounted on body so spring fits over tang.

Model Code

SE3 - 02 - * ** - * - 10**

┌───┐ ┌───┐ ┌──┐ ┌──┐ ┌───┐ ┌───┐
└───┘ └───┘ └──┘ └──┘ └───┘ └───┘
1 2 3 4 5 6

1 Model Series

SE - Servo valve, flapper, 3 way

2 Series

**3 Times 0.1 Equals Flow Rate
in GPM**

**4 Times 100 Equals Supply Pressure
in PSI**

6 Design

**5 Times 10 Equals Coil Resistance
in Ohms**

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 20/18/15 or cleaner. Selections from Eaton OFP, OFR and OFRS filter series are recommended.

Printed in U.S.A.