


Pressure Controls



Pressure Reducing Valves

X(C)G-06-* *-30

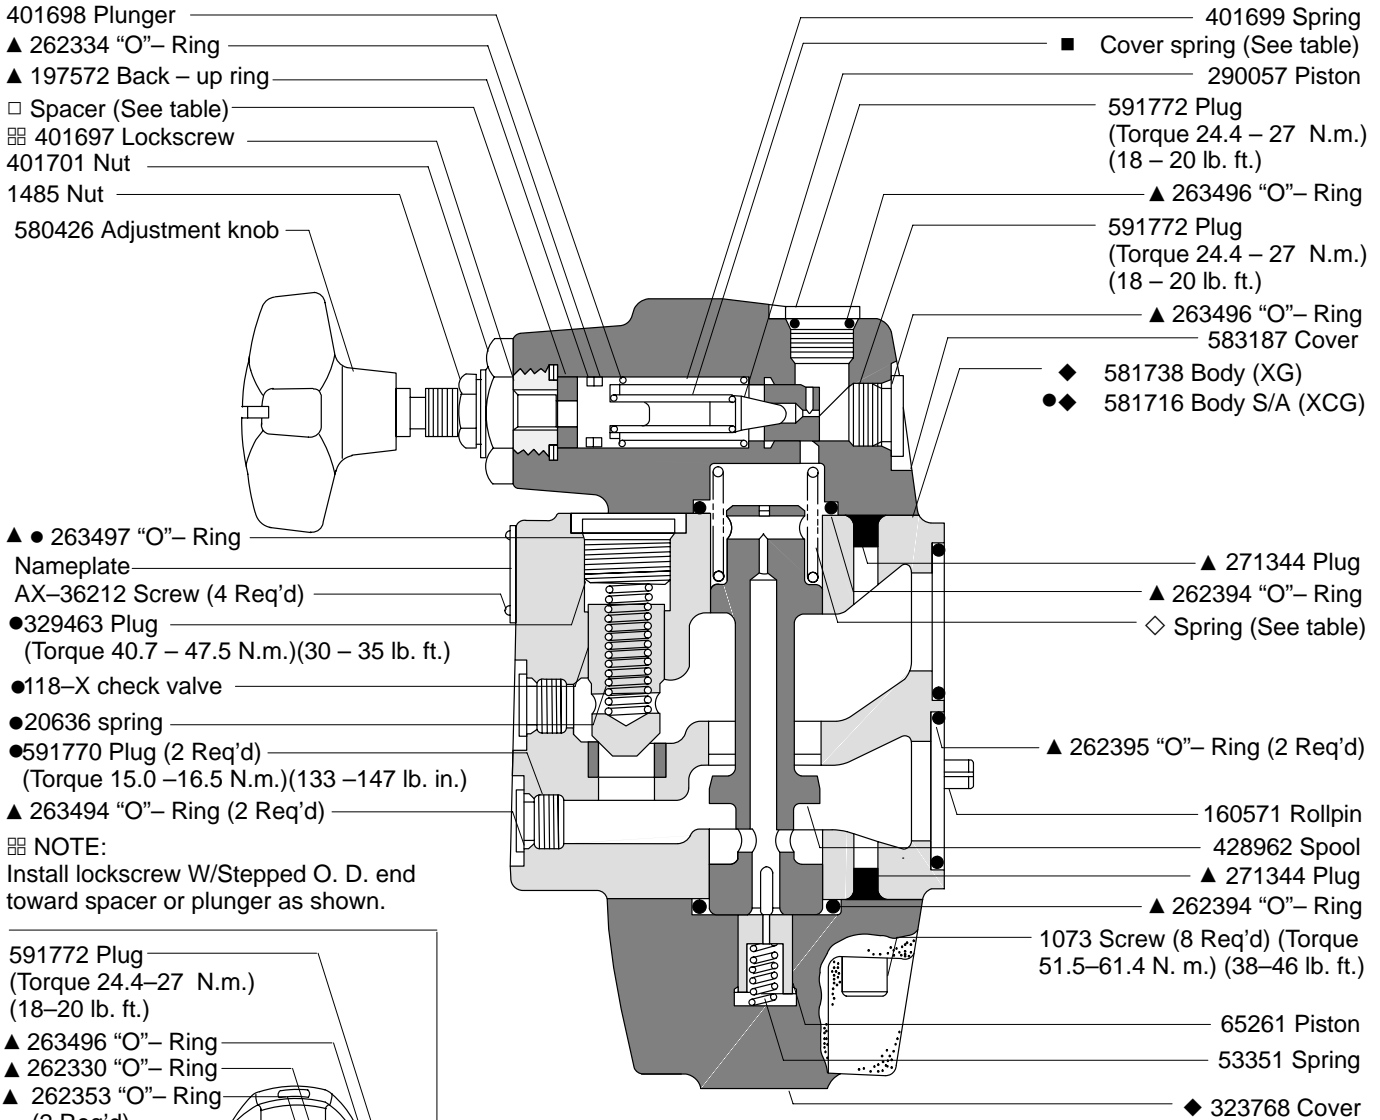


Model	◇ Spring	■ Cover spring	□ Spacer	Pressure range P.S.I.	Rated flow USGPM
X(C)G-**-1B-30	322653	2280		80–1000	15
X(C)G-**-1F-30	348614			200–1000	30
X(C)G-**-2B-30	322653	583937		80–2000	15
X(C)G-**-2F-30	348614			200–2000	30
X(C)G-**-3B-30	322653	401700	386715	200–2850	15
X(C)G-**-3F-30	348614				30

- ▲ Service all units with F3 seal kit 919615.
- ◆ Not available for sale.
- Used on model XCG only.

Model Code

(F3) - X(C)G - 06 - * * -30



**1 Seals for mineral oil
& fire resistant fluids**

2 Pressure reducing valve

**3 Integral check valve
Omitted – no check valve**

4 Manifold or subplate mounted

5 Nominal valve size $\frac{3}{4}$ inch

6 Maximum adjustable pressure

1 – 1000 PSI
2 – 2000 PSI
3 – 3000 PSI

7 Maximum rated flow capacity

B –15 USGPM
F –30 USGPM

8 Design